3-Moment Theorem

- Continuity in Beams
- Three-Moment Theorem
- 2-Hinged Frames
- 3-Hinged Frames
- 3-Hinged Arches
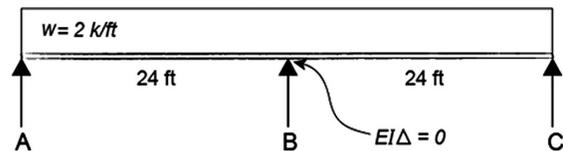
Salginatobel Bridge
Switzerland, 1930
300 ft span 42 ft rise
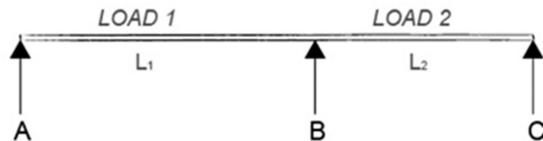Robert Maillart

Continuous Beam Analysis

Deflection Method
- Two continuous, symmetric spans
- Symmetric Load

$w = 2\ k/ft$

24 ft   24 ft

A   B   C

$EI\Delta = 0$

Slope Method ✓
- Two continuous spans
- Non-symmetric loads and spans

LOAD 1   LOAD 2

L_1 L_2

A   B   C

3-Moment Theorem
- Any number of continuous spans
- Non-Symmetric Load and Spans

M_A M_C

A L_1 B L_2 C

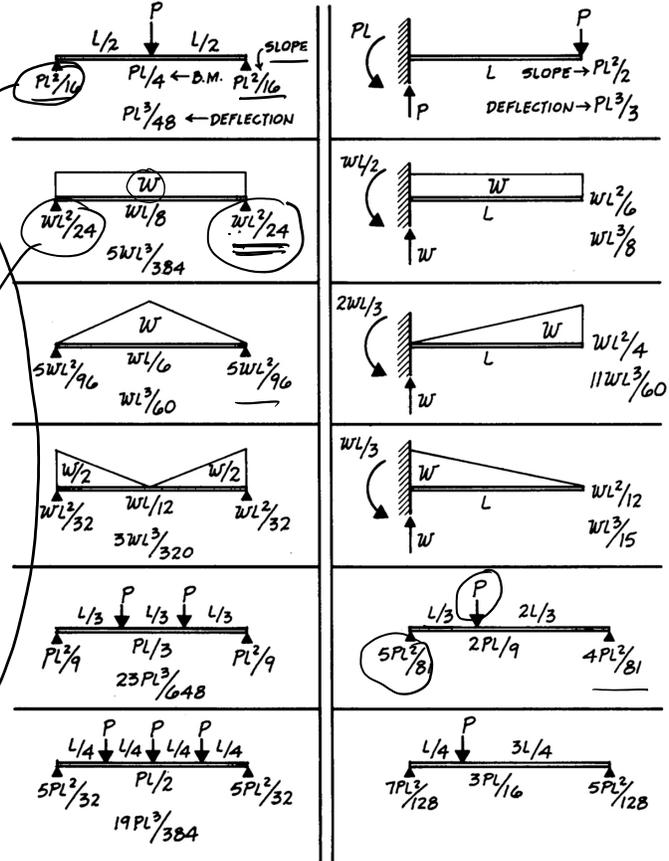$$M_A L_1 + 2M_B(L_1 + L_2) + M_C L_2 = 6[EI\Theta_1 + EI\Theta_2]$$

3-Moment Theorem

- Any number of continuous spans
- Non-Symmetric Load and Spans

$\dfrac{ML}{6}$ $\dfrac{ML}{3}$

M L M/L M/L

$M_A = 0$ $M_C = 0$

A L_1 B L_2 C

Loads

$EI\Theta_1$ $EI\Theta_2$

M_A $\dfrac{M_A L_1}{6}$ $\dfrac{M_C L_2}{6}$ M_C

$\dfrac{M_B L_1}{3}$ $\dfrac{M_B L_2}{3}$ M_B

$+EI\Theta_1 - \dfrac{M_A L_1}{6} - \dfrac{M_B L_1}{3} = -EI\Theta_2 + \dfrac{M_C L_2}{6} + \dfrac{M_B L_2}{3}$

$$M_A L_1 + 2M_B(L_1+L_2) + M_C L_2 = 6\left[EI\Theta_1 + EI\Theta_2\right]$$
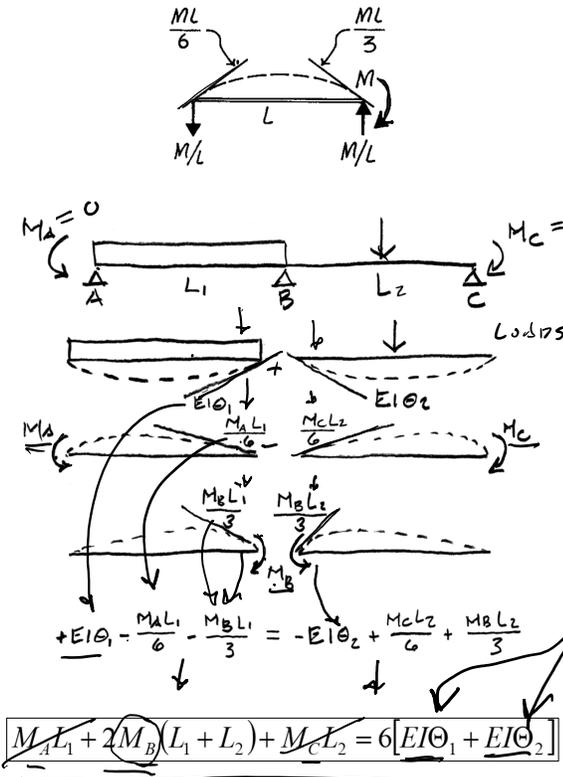
MAXIMUM VALUES: SLOPE, DEFLECTION, AND BENDING MOMENT
NOTE: VALUES OF SLOPE AND DEFLECTION TO BE DIVIDED BY "EI"

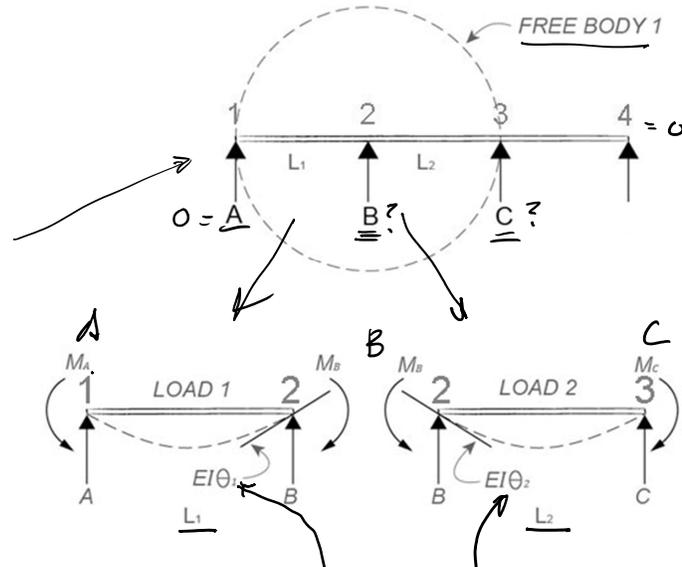|	
P at midspan, $L/2$, $L/2$, $Pl^2/16$ — SLOPE, $Pl/4$ — B.M., $Pl^2/16$, $Pl^3/48$ — DEFLECTION	PL, P, L, SLOPE → $Pl^2/2$, DEFLECTION → $Pl^3/3$
w, $wl^2/24$, $wl/8$, $wl^2/24$, $5wl^3/384$	$wl/2$, w, L, w, $wl^2/6$, $wl^3/8$
w, $5wl^2/96$, $wl/6$, $5wl^2/96$, $wl^3/60$	$2wl/3$, w, L, w, $wl^2/4$, $11wl^3/60$
$w/2$, $wl^2/32$, $wl/12$, $w/2$, $wl^2/32$, $3wl^3/320$	$wl/3$, w, L, w, $wl^2/12$, $wl^3/15$
P, $L/3$, $L/3$, $L/3$, $Pl^2/9$, $Pl/3$, $Pl^2/9$, $23Pl^3/648$	P, $L/3$, $2L/3$, $5Pl^2/81$, $2Pl/9$, $4Pl^2/81$
P, $L/4$ $L/4$ $L/4$ $L/4$, $5Pl^2/32$, $Pl/2$, $5Pl^2/32$, $19Pl^3/384$	P, $L/4$, $3L/4$, $7Pl^3/128$, $3Pl/16$, $5Pl^2/128$

Three-Moment Theorem

- Any number of spans
- Symmetric or non-symmetric

Procedure:

1. Draw a free body diagram of the first two spans.
2. Label the spans L1 and L2 and the supports (or free end) A, B and C as show.
3. Use the Three-Moment equation to solve for each unknown moment, either as a value or as an equation.

FREE BODY 1

1   2   3   4 = 0
L_1 L_2

$0 = A$ B ? C ?

A B C

M_A 1   LOAD 1   2 M_B M_B 2   LOAD 2   3 M_C

$EI\Theta_1$ $EI\Theta_2$

A B B C

L_1 L_2

$$M_A L_1 + 2M_B(L_1+L_2) + M_C L_2 = 6\left[EI\Theta_1 + EI\Theta_2\right]$$

## Three-Moment Theorem
Procedure (continued):

4. Move one span further and repeat the procedure.
5. In a 3 span beam, the mid-moment from step 3 above (B), can now be solved using the two equations from step 4 and 3 together, by writing 2 equations with 2 unknowns.
6. Repeat as needed, always moving one span to the right and writing a new set of moment equations.
7. Solve 2 simultaneous equations for 3 spans, or 3 equations for more than 3 spans, to get the interior moments.
8. Once all interior moments are known, solve for reactions using free body diagrams of individual spans.
9. Draw shear and moment diagrams as usual. This will also serve as a check for the moment values.
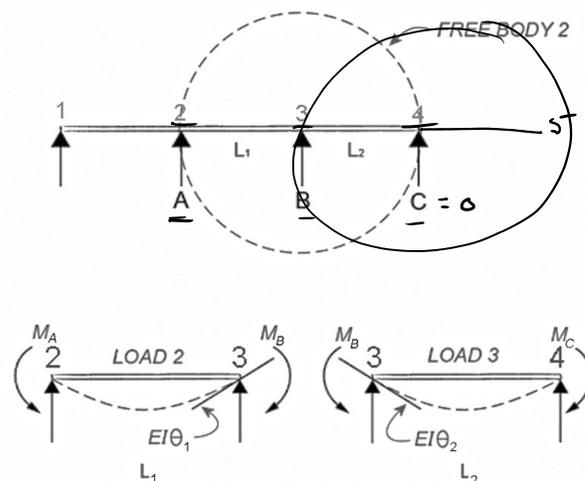
$$M_A L_1 + 2M_B(L_1 + L_2) + M_C L_2 = 6[EI\Theta_1 + EI\Theta_2]$$

Three-Moment Theorem Example

Given: Three non-symmetric spans with loading as shown.
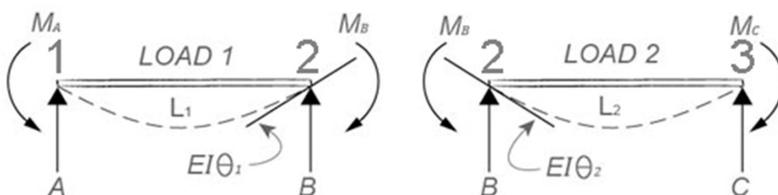
Find: All four reactions

1. Draw FBD

2. Label

3. Solve 3-moment equation

FIRST EQUATION (AT 1, 2 AND 3):

$M_A = 0$ $L_1 = 12$ $EI\Theta_1 = \dfrac{w\ell^2}{24} = \dfrac{48(12)^2}{24} = \underline{288}$

$M_B = M_2$ $L_2 = 30$

$M_C = M_3$ $L_1 + L_2 = 42$ $EI\Theta_2 = \dfrac{5P\ell^2}{81} = \dfrac{5(60)(30)^2}{81} = \underline{3333.3}$

$M_A L_1 + 2M_B(L_1 + L_2) + M_C L_2 = 6[EI\Theta_1 + EI\Theta_2]$

$0(12) + 2M_2(42) + M_3(30) = 6[288 + 3333.3]$

$\underline{M_2} = 258.667 - 0.35714 M_3$

Three-Moment Theorem Example (cont.)

$$M_A L_1 + 2M_B(L_1 + L_2) + M_C L_2 = 6\left[EI\Theta_1 + EI\Theta_2\right]$$

4. Move one span further and repeat the procedure.

SECOND EQUATION (AT 2, 3 AND 4):

$M_A = M_2$ $L_1 = 30$ $EI\Theta_1 = \dfrac{4Pl^2}{81} = \dfrac{4(60)(30)^2}{81} = 2666.67$

$M_B = M_3$ $L_2 = 15$

$M_C = 0$ $L_1 + L_2 = 45$ $EI\Theta_2 = \dfrac{wfl^2}{24} = \dfrac{90(15^2)}{24} = 843.75$

$M_2(30) + 2M_3(45) + 0(15) = 6[2666.67 + 843.75]$

$M_2 = 702.084 - 3M_3$

SIMULTANIOUS SOLUTION:

$258.667 - .35714 \, M_3 = 702.084 - 3M_2$

$M_3 = 443.417 / 2.6428 = 167.779 \; ^{K-I} \; M_3$

$M_2 = 702.084 - 3(167.779) = 198.746 \; ^{K-I} \; M_2$

Three-Moment Theorem Example (cont.)

Sign convention

$+V$ $-V$ $+M$ $-M$

8. Once all interior moments are known, solve for reactions using free body diagrams of individual spans.
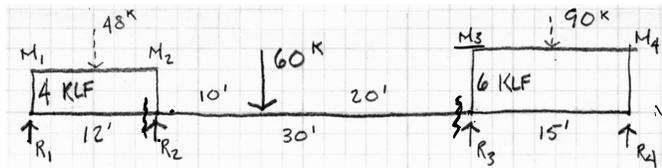
SOLVE REACTIONS WITH FBD's

$\Sigma M @ R_2 = + R_1(12) - 48(6) + 198.7 = 0$

$R_1 = 7.4378 \; ^K$

$\Sigma F_v = 7.4378 - 48 + V = 0$

$V = 40.5622$

CLOCKWISE

$\Sigma M @ R_3 = R_2(30) - 40.5622(30) - 60(20) - 198.75 + 167.78 = 0$

$R_2 = 81.594 \; ^K$

$\Sigma F_v = -40.5622 + 81.594 - 60 + V = 0$

$V = 18.967$

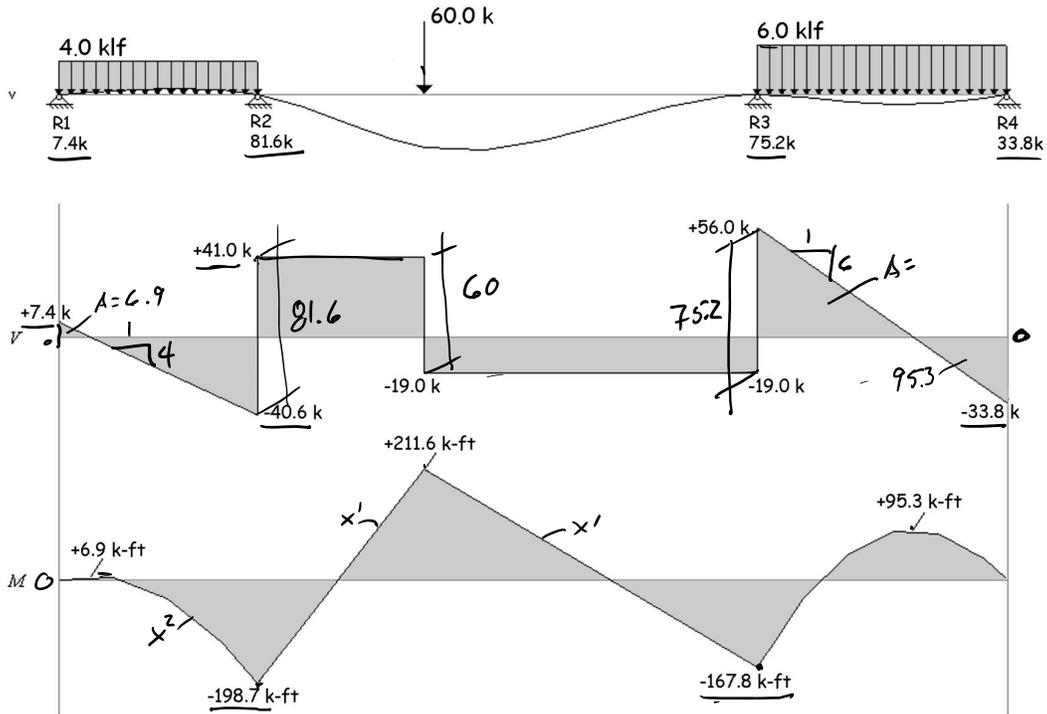$\Sigma M @ R_4 = -167.78 - 18.967(15) + R_3(15) - 90(7.5) = 0$

$R_3 = 75.1531 \; ^K$
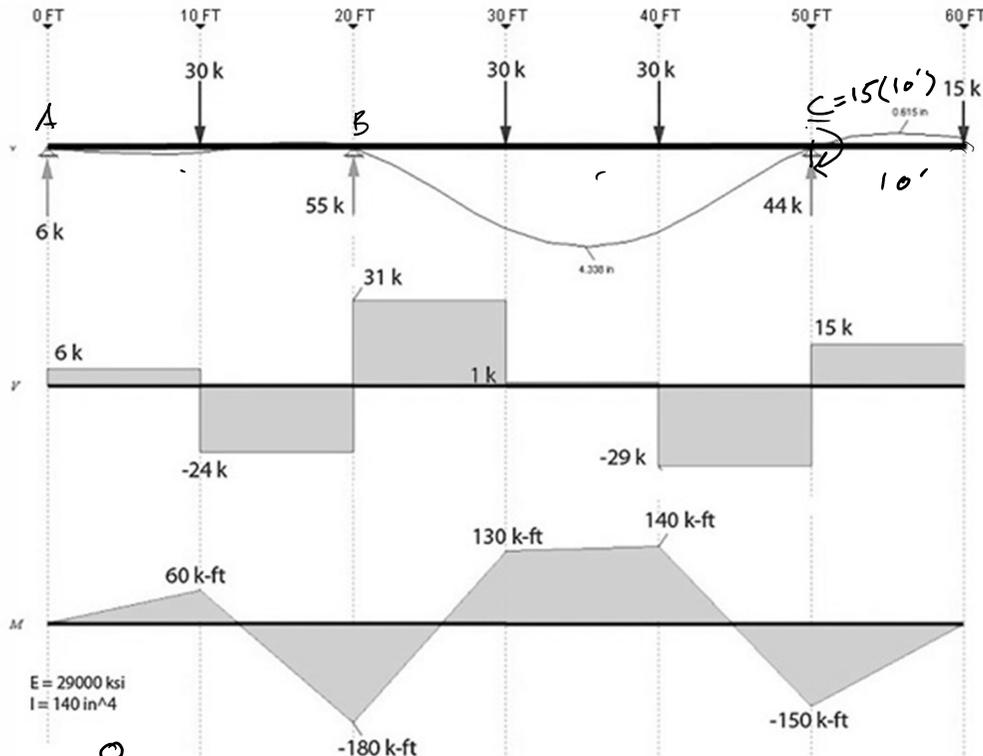
$\Sigma M @ R_3 = -167.78 + 90(7.5) - R_4(15) = 0$

$R_4 = 33.8147 \; ^K$

Three-Moment Theorem Example (cont.)

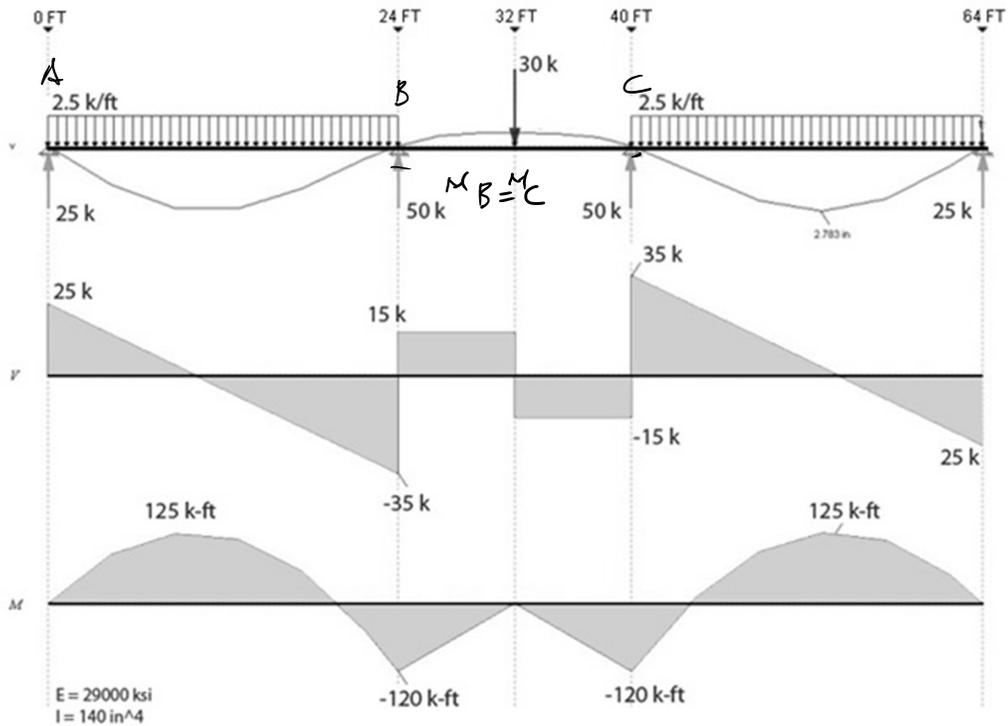9. Draw shear and moment diagrams as usual. This will also serve as a check for the moment values.

60.0 k

4.0 klf

6.0 klf

R1
7.4k

R2
81.6k

R3
75.2k

R4
33.8k

+41.0 k

+56.0 k

+7.4 k   A=6.9

81.6

60

75.2

4

-19.0 k

-19.0 k

95.3

-40.6 k

-33.8 k

+211.6 k-ft

+95.3 k-ft

+6.9 k-ft

M O

-198.7 k-ft

-167.8 k-ft

Three-Moment Theorem – 2 Spans

0 FT   10 FT   20 FT   30 FT   40 FT   50 FT   60 FT

30 k

30 k   30 k

C=15(10') 15 k
0.615 in

A

B

55 k

44 k

6 k

10'

31 k

4.338 in

6 k

15 k

V

1 k

-24 k

-29 k

140 k-ft

130 k-ft

60 k-ft

M

E = 29000 ksi
I = 140 in^4

-150 k-ft

-180 k-ft

150

$$M_A L_1 + 2M_B(L_1 + L_2) + M_C L_2 = 6[EI\Theta_1 + EI\Theta_2]$$

Three-Moment Theorem – 3 Spans

$$\overset{\circ}{M_A}L_1 + 2M_B(L_1 + L_2) + M_{\mathscr{C}}L_2 = 6\left[EI\Theta_1 + EI\Theta_2\right]$$

2-Hinge Frame

- Statically indeterminate

- Find negative moment at knee

- Sum of Θ's left and right of knee are equal

- Symmetric case solution is:

$$M = \frac{6\ EI\Theta}{2h + 3L}$$
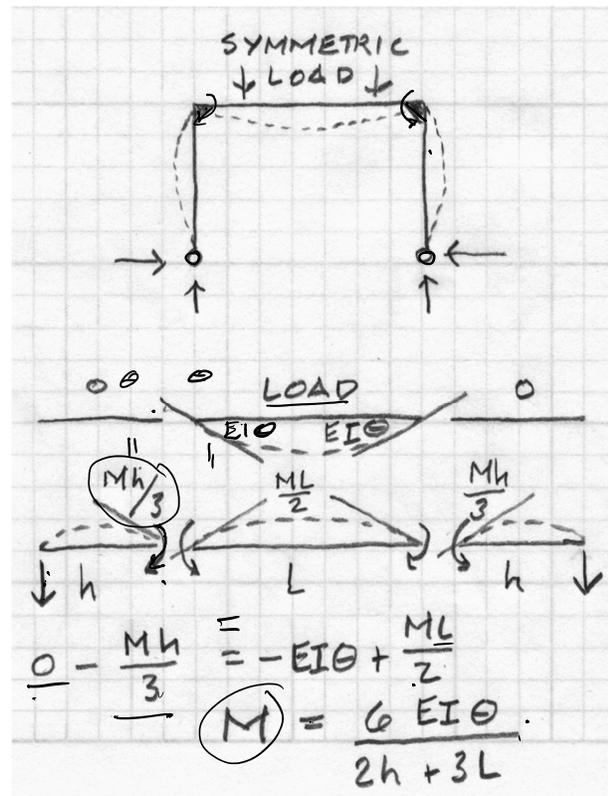
2-Hinge Frame example

- Symmetric case solution

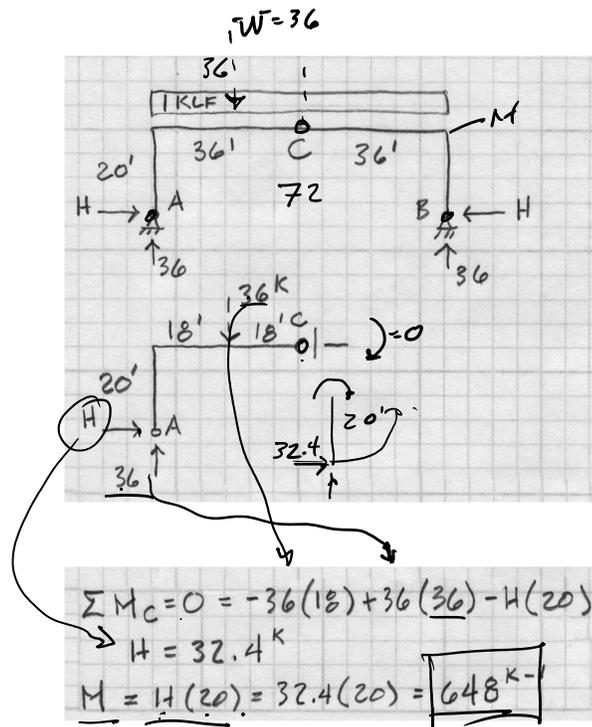- Vertical reactions by symmetry

- Find moment at knee

- With FBD of one leg find H
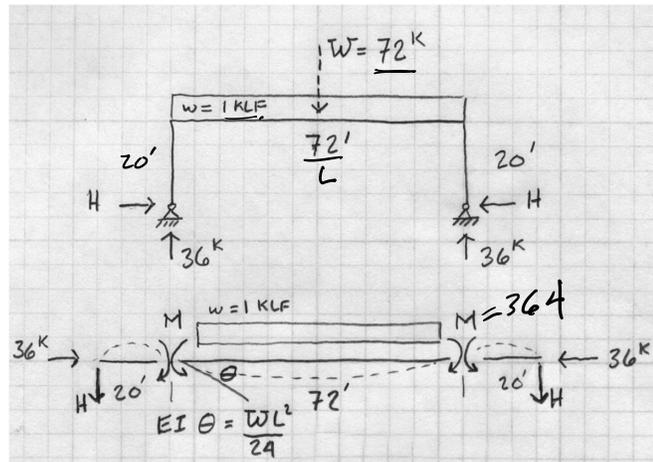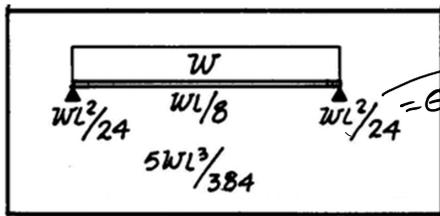
$$M = \frac{6\, EI\theta}{2h + 3L} = \frac{6\, \frac{72(72)^2}{24}}{2(20) + 3(72)} = \underline{364.5}^{k-1} = M$$

$$M = H(20), \quad H = \frac{M}{20} = \frac{364.5}{20} = \underline{18.2}^{k}$$

3-Hinge Frame comparison

- Statically determinate

- Solve with statics

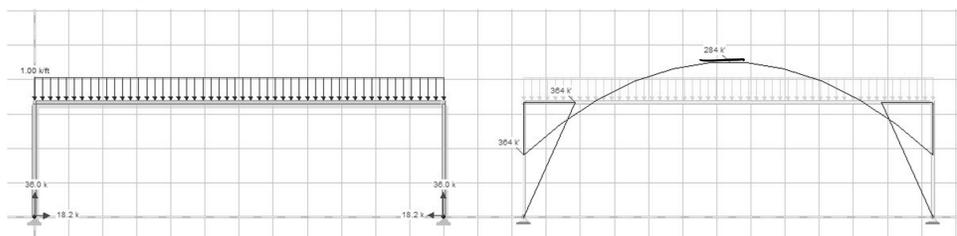- FBD of half from hinge

- Solve for H

- Use FBD of leg to solve M

$$\Sigma M_C = 0 = -36(18) + 36(36) - H(20)$$
$$H = 32.4^{k}$$
$$M = H(20) = 32.4(20) = \boxed{648}^{k-1}$$

Comparison of moments

- 2-hinge frame

- 3-hinge frame
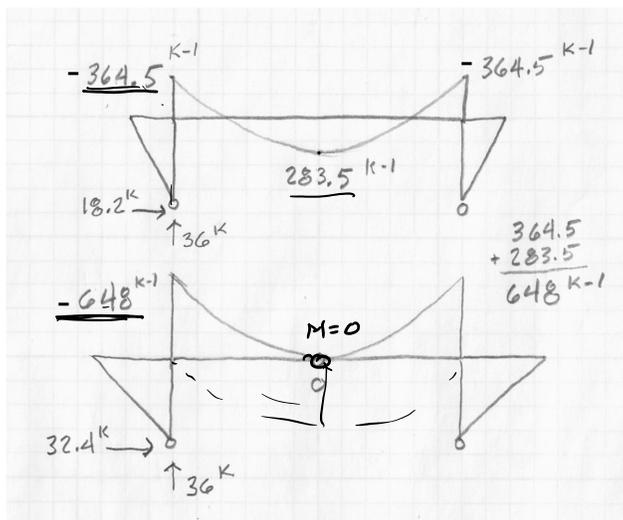
The effect of shape and hinges

Moment:
knee: -364 ft-lbs
center: +284 ft-lbs
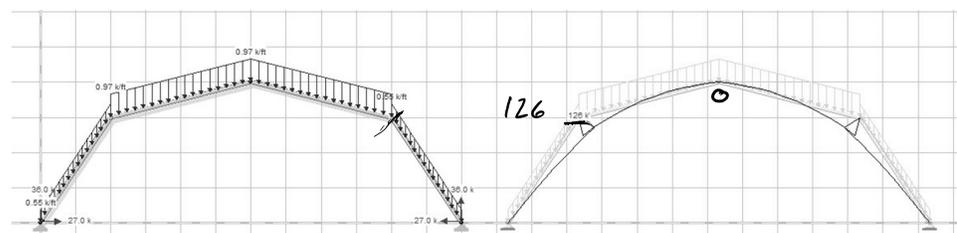horz. react. = 18.2 k

Continuous Beam

Moment:
knee: -648 ft-lbs
center: 0 ft-lbs
horz. react. = 32.4 k
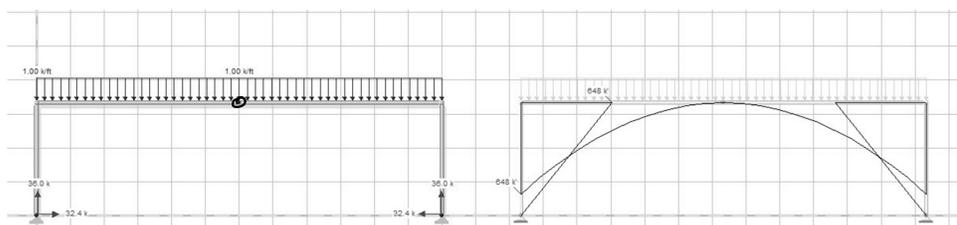
Beam with center hinge

Moment:
knee: -126 ft-lbs
center: 0 ft-lbs
horz. react. = 27.0 k

3 Hinged Arch

Characteristics of a 3-Hinged Arch

- Statically determinate – can be calculated with statics
- Movement or settling of foundations will not alter member stresses
- Small fabrication errors in length do not affect internal stresses
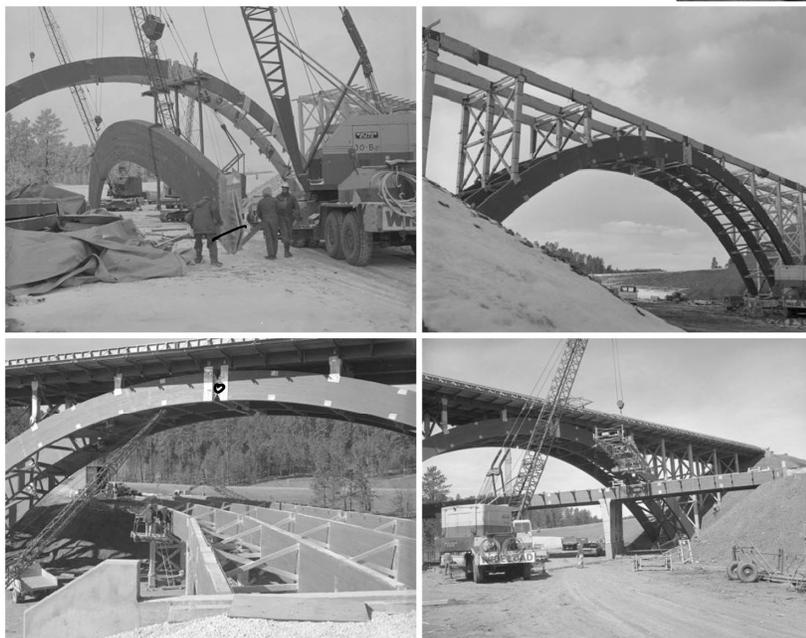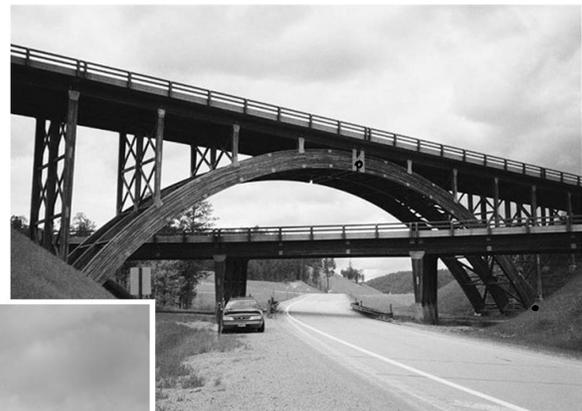- Hinge placement can reduce internal stresses

THE MACHINERY HALL
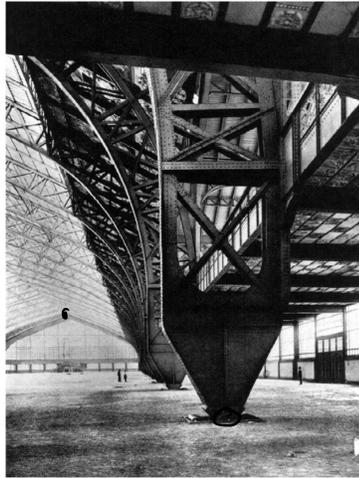
Gallery of the Machines, 1889 Paris
Architect: Ferdinand Dutert
Engineer: Victor Contamin
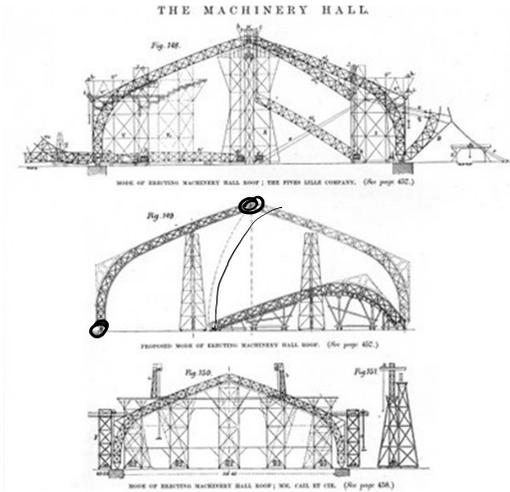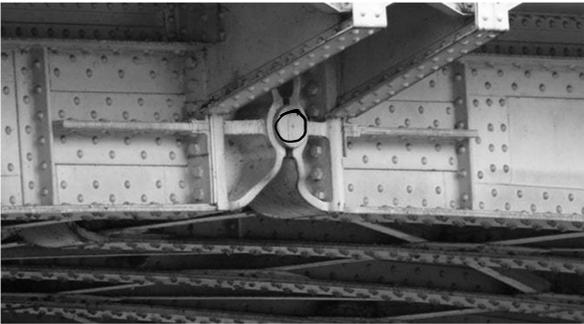

Keystone Wye Bridge
Glulam arches, spanning 160 ft.
built 1967-68 in South Dakota

Examples and Details

Sydney Harbour Bridge

Sydney Harbour Bridge   Center Hinge

The Iron Bridge
Telford England

Hinged Glulam Timbers